

Wall-mounted automatic one-piece urinal

USWN900B(DC) USWN900BE(AC)



USWN900B USWN900BE

FEATURES

 Integral design of inductor and urinal building more stylish public space •Low height design, meet the needs of more people With CeFiONtect and smooth surface exceeding nanometer-class designed for providing, no gap to contain adhered stain and ensuring easier cleaning, without need of excessive water and cleaning agent Inductive flush without contact during the whole process, secure and sanitary for use

•An automatic flushing


Wall-mounted automatic one-piec every 24 hours, embodying a more considerate design

•The control part is on the top of the product, easy for maintenance

SPECIFICS

Size:380*420*920mm Water supply: 0.07MPa(Dynamic Pressure)~ 0.75MPa(Static Pressure) Water flush:0.5L Water efficiency grade: Grade 1 Water inlet model: Rear water spout Sensing distance: In 650mm away from the front of inductive window Installment: Wall-mount

USWN900B/USWN900BE/USWN900BS

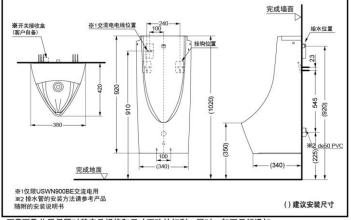

^{*} TOTO公司保留对其产品规格和尺寸更改的权利。届时, 恕不另行通知。 *TOTO(CHINA) CO., LTD. All rights reserve.