




FEATURES

- Floor-fixing installing which does not need wall fixing makes installing more flexible and adaptive.
- More convenient inner water accessories and control panel quick installing design for installing and maintaining.
- New drainage valve with multi available shifts.
- New higher-performance water-in valve.

WH058R-682B/WH058R-941B Manual Concealed Flush Tank (Self-Supporting)

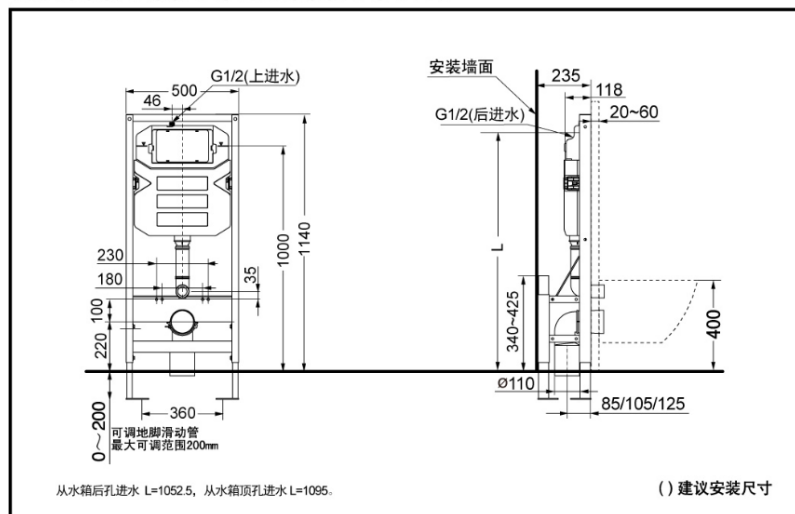

SPECIFICS

Drainage: 3.3/6.0L

Water supply:

0.05MPa(dynamic pressure) ~
0.75MPa(static pressure)

OTHERS

Recommend fittings:

Panel: MB003CPR-2/MB004CPR
MB170P Series/MB174P Series/
MB176G#WH
Toilet: CW682B/CW941B

*TOTO(CHINA) CO.,LTD. All rights reserved.