










† Auto Sanitizi Functions

XOnly available on USWN902BS

Wall-mounted automatic USWN902B/USWN902BE/USWN902BS one-piece urinal

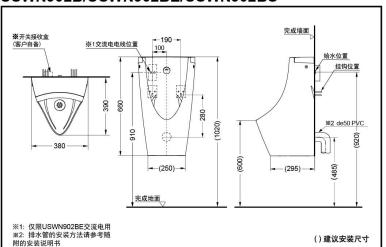

*TOTO(CHINA) CO.,LTD. All rights reserve.

USWN902B

USWN902BE

USWN902BS

FEATURES

- Integral design of inductor and urinal building more stylish public space.
- Carrying sterilized water can inhibit the adhesion of dirt in urinal trap.
- Automatic flushing for 2 hours can inhibit the adhesion of urinary stones in the horizontal drainage pipe of urinal.
- With CeFiONtect and smooth surface exceeding nanometerclass designed for providing, no gap to contain adhered stain and ensuring easier cleaning, without need of excessive water and cleaning agent
- Inductive flush without contact during the whole process, secure and sanitary for use
- Interval flush with sanitizing flush keeps easy maintenance for drainage pipe.
- The control part is on the top of the product, easy for maintenance.

SPECIFICS

Size: 390x380x660mm

Nominal water consumption:

0.5L

Water efficiency grade:

Grade 1

Water supply:

0.07MPa(Dynamic Pressure)~ 0.75MPa(Static Pressure)

Flush volume:0.5L

Power: 220V(50Hz) Water inlet model:

Rear water spout

Sensing distance:

650mm away from the front of inductive window

Installment: Wall-mount