

CW767EBT305/SW767B
CW767EBT400/SW767B
TC400CVK-1
TC401CVK-1

FEATURES

- 4.8L flushing system, low consumption.
- Tornado flushing system makes the best use of water in a strong, clean and quiet way.
- Cefiontect applied. Debris, mold and bacteria being prevented from sticking to ceramic surfaces leads to fewer chemicals and water in cleaning .

SPECIFICS

Size: 727*445*698mm

Nominal water consumption:
4.8L

Water efficiency grade:
Grade2

Drainage mode: Underneath
Drainage


Flush type: Tornado Flush

Rough-in: 305mm/400mm

Water Inlet Requirement:
0.05MPa(Dynamic Pressure)~
0.75MPa(Static Pressure)



CW767EBT305/SW767BT305
CW767EBT400/SW767BT400 Two-piece Toilet

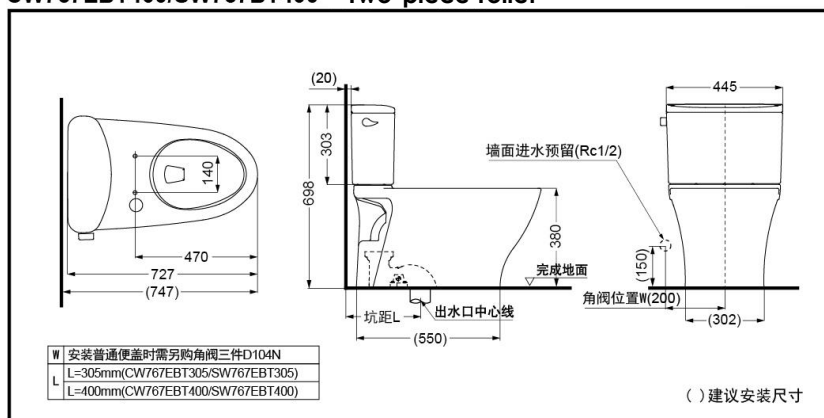

* TOTO(CHINA) CO.,LTD. All rights reserved.

OTHERS

Recommend fittings:
Washlet TC400CVK-1,
TC401CVK-1