TOTO

NEOREST® LS
NEOREST One-piece Toilet

PRODUCT SPECIFICATIONS

The high-end LS model brings a sense of elegant luxury, Its beautiful wave-like lines present an elegance that harmonizes with the space, while metallic accents add a glamour that still blends in, and its full-skirted shape creates a sense of luxury。

reddot winner 2022

FEATURES

- The toilet seat has an ergonomic rounded design to ensure comfortable seating。
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces。
- EWATER+® auto-cleans wand, bowl, and under-seat。
- PREMIST® on bowl before each use。
- Ultra high-efficiency dual flush function - 4.5L/3.0L。
- Gentle Aerated, Warm Water, Dual Action Spray with oscillating and pulsating feature。
- Auto lid open/close。
- Auto flush。
- Automatic air deodorizer。
- Heated Seat with Temperature Control。
- Warm Air Dryer function。
- Adjustable spray position。
- Programmable energy saver system。
- Multifunctional horizontal remote control。
- Energy save timer。
- Smooth seam seat design eliminates the gap under the seat。

TECHNOLOGY & INNOVATION HIGHLIGHTS

- EWATER+ for WAND
- EWATER+ for BOWL
- EWATER+ for UNDER SEAT
- AIR-IN WONDER-WAVE
- WARM AIR DRYING
- HEATED SEAT
- DEODORIZER
- CEFIONTECT
- TORNADO FLUSH
- RIMLESS
- WATER SAVING
- AUTO OPEN/CLOSE LID
- AUTO FLUSH
- PREMIST

COMPONENTS

CES8E120KCNP

● TCF8E170KCN#W	Functional unit
● CS911P T1#XW	Toilet unit
● HP103TP#00	Wall drainage connectors (H=120-130mm)

COLORS

- Silver （remote control，Body display part）

CODES/STANDARDS

・Please refer to the label for product standards。

TOTO

TOTO(CHINA) CO.,LTD. All rights reserved.

TOTO（CHINA）CO.,LTD
www.toto.com.cn
service hotline :
800-820-9787(Toll Free Hotline) 400-820-9787(Mobile Hotline)

TOTO

NEOREST® LS
NEOREST One-piece Toilet

DIMENSIONAL DRAWINGS

CES8E120KCNP NEOREST One-piece Toilet

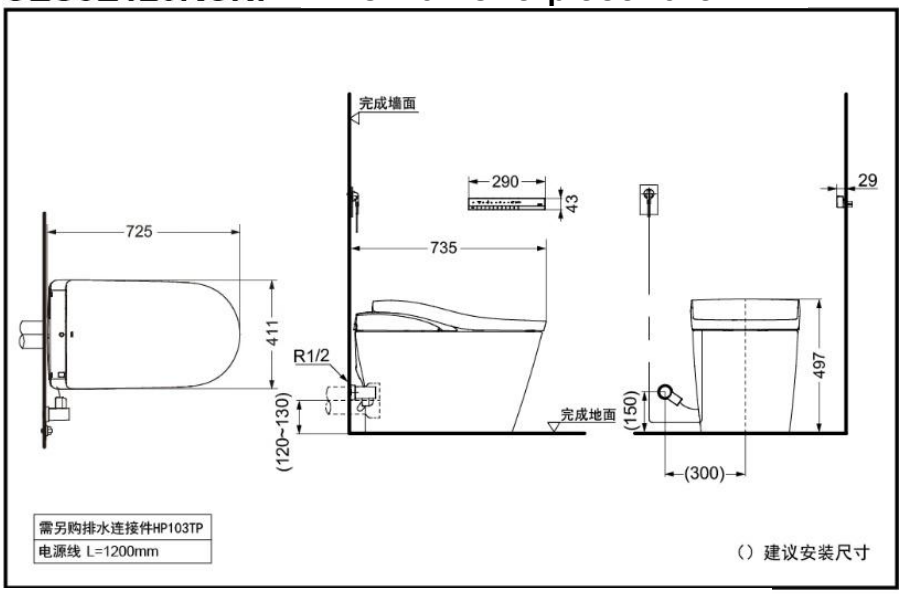

TOTO(CHINA) CO.,LTD. All rights reserved.

SPECIFICATIONS

CES8E120KCNP	
额定电源	AC220V.50Hz
额定功率	834W
最大功率	1448W<进水温度0° C时>
温水加热方式	瞬间式
电源线长度	1.2m
防水保护等级	IPX4
水效等级	2级
进水压力	最低必要水压：0.05MPa<流动时>
	最高水压：0.75MPa<静止时>
进水温度	0-35° C
使用温度	0-40° C
产品尺寸	宽411mm×长725mm×高497mm
产品重量	约50kg

便器部		
坐便器	冲洗水量	大4.5L，小3.0L
	名义冲水量	3.5L
	进水方式	管道直压与内置水箱储水混合式
	冲洗方式	喷射虹吸式
	尺寸	加长型

机能部		
洗净装置	喷水量	臀部洗净：0.32-0.43L/min
		臀部轻柔洗净：0.32-0.43L/min
		下身洗净：0.29-0.43L/min
		下身护理洗净：0.35-0.43L/min
	水势调节	5档
	吐水温度	温度调节范围：关，约30-40° C
	加热器功率	1200W
	安全装置	温度保险丝
	防逆流装置	真空开关，止回阀
加热便座	表面温度	温度调节范围：关，约28-36° C
		超级自动节电时：关
	加热器功率	510W
	安全装置	温度保险丝
除臭装置	方式	O2除臭
	风量	标准模式：约0.09m³/min 强力模式：约0.16m³/min
	功率(耗电量)	标准模式：约1.6W 强力模式：约4.0W
温风干燥	温风温度	温度调节范围：约35-60° C
	风量	约0.25m³/min
	加热器功率	261W
	安全装置	温度保险丝

TOTO

TOTO(CHINA) CO.,LTD. All rights reserved.

TOTO（CHINA）CO.,LTD
www.toto.com.cn
service hotline：
800-820-9787(Toll Free Hotline) 400-820-9787(Mobile Hotline)