



FEATURES

- 3.8L水冲洗，节水环保。



Cefiontect

Tornado
Flushing

Reduce
The Water

Rimless

SPECIFICS

Size: 722x420x655mm

Water Inlet Requirement:
0.05MPa(Dynamic Pressure)
~0.75MPa(Static Pressure)

Nominal water consumption:
3.8L

Water efficiency grade:
Grade 1

Flush type: Siphon Injection

Drainage mode:


Underneath Drainage

Rough-in:

CW188SEBT305 : 305mm

CW188SEBT400 : 400mm

CW188SEBT305/CW188SEBT400 One-piece Toilet

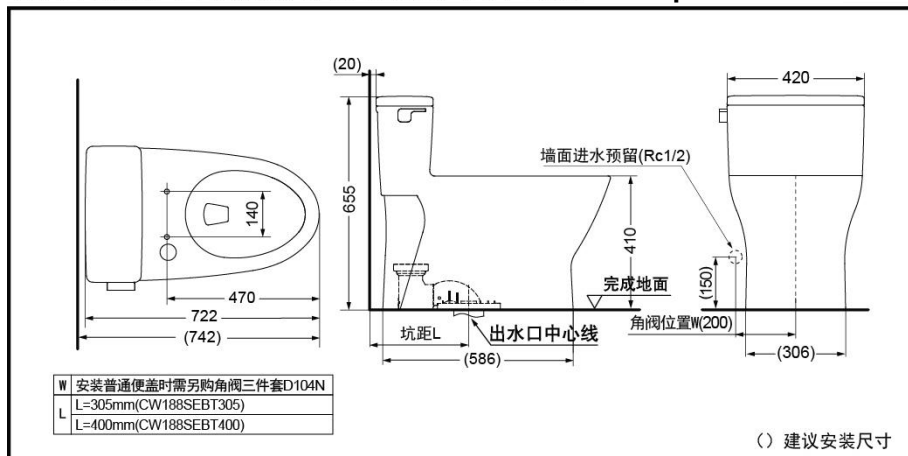

OTHERS

Recommend fittings :

TC400CVK-1; TC401CVK-1.

Waslet: S7series; S5series.

Toilet installation 3 pieces kit:
D104N