



FEATURES

- 4.8L水冲洗，节水环保。



Cefiontect

Tornado
Flushing

Reduce
The Water

Rimless

SPECIFICS

Size: 727x428x657mm

Water Inlet Requirement:
0.05MPa(Dynamic Pressure)
~0.75MPa(Static Pressure)

Nominal water consumption:
4.8L

Water efficiency grade:
Grade2

Flush type: Siphon Injection

Drainage mode:

Underneath Drainage

Rough-in:

CW887REBT305 : 305mm

CW887REBT400 : 400mm

OTHERS


Recommend fittings :

TC400CVK-1; TC401CVK-1。

Waslet: S7series; S5series。

Toilet installation 3 pieces kit:
D106A

CW887REBT305/CW887REBT400 One-piece Toilet

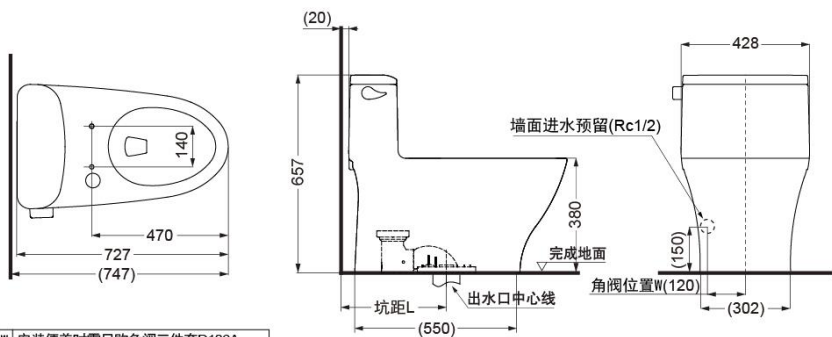

W	安装便盖时需另购角阀三件套D106A
L	L=305mm(CW887REBT305)
L	L=400mm(CW887REBT400)

() 建议安装尺寸